


MODEL TR-19 or TR-25 SPECIFICATIONS

Capacity:	19,000 or 25,000 lbs.
Lifting Speed:	120 seconds
Motor Rating:	2.5 HP/220 V Single-Phase (3 phase optional)
Lifting Mechanism:	5" Hydraulic Cylinder Attached to (4) #646 Leaf Chains
Overall Length:	27'-3" (with 20' runways)
Track Length:	16', 20' 25' or 30'
Overall Width:	12' 6"
Lifting Stroke:	5'
Height @ Full Stroke:	5' 9 5/16" (top of runways)
Track Width:	24"
Track Adjustment:	4' to 8'
Clearance Between Posts:	11' Standard (Wider Available)
Mechanical Safety Release:	Single Point
Mechanical Safety Locks:	Multi-Positions
Back-Up Hydraulic Safety Systems:	Pressure Compensated Flow Controls & Velocity Fuses
Concrete requirements:	4000 PSI concrete 4 1/2" thick floor
Warranty:	3 years; (Excluding Motor/Pump)
Lift Weight:	5250 lbs (with 20' tracks)

Available Options

- 3' track extensions: front, rear, or both
- 3 phase power:
208/230 3 phase 60 hz/460
volt 3 phase 60 hz
380 volt 3 phase 50 hz/575
volt 3 phase 60 hz
- Alignment turntable cut outs in tracks
- Rolling hydraulic jacking beam
- Rolling jacking platform
- Air lines plumbed into tracks
- Obstacle sensor package
- 115 volt duplex outlet
- Runway lighting
- Lockable main switch
- Electric solenoid down valve
- Audible descent alarm
- Drive through ramps
- 25 gallon rolling oil drain pan

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

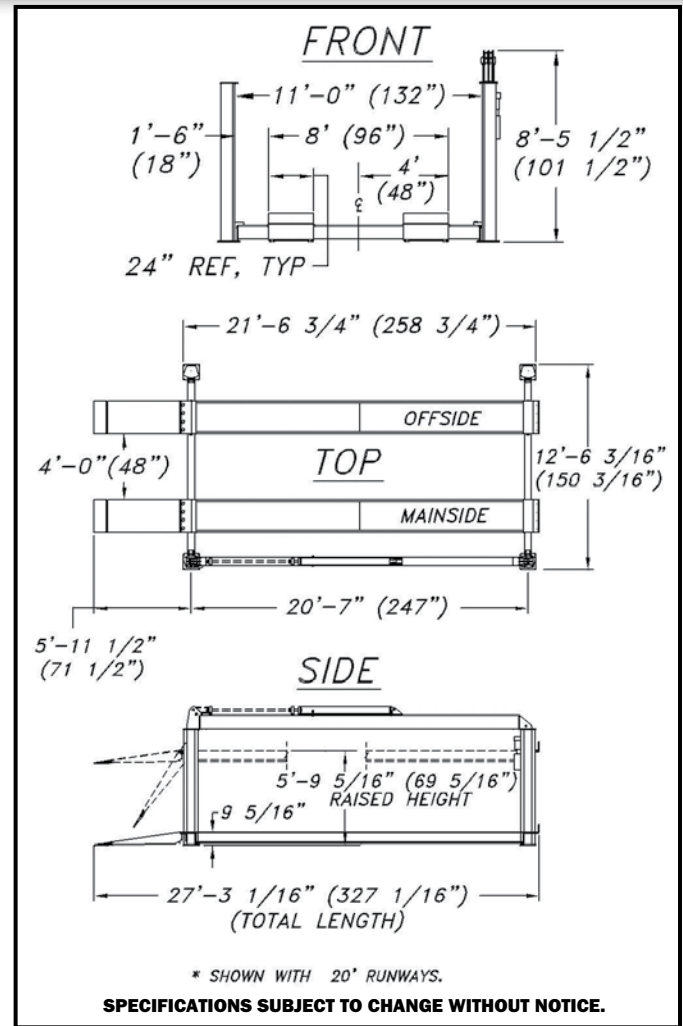

**AUTOCAD specs available online
at www.mohawklifts.com/architects**



National Stock Number 4910-01-424-8934 (NSN)
AS SEEN IN GSA ADVANTAGE

SIN #253-23 • CAGE CODE-OC714 • DUNS #10-128-9916



www.facebook.com/mohawklifts

MOHAWK

Mohawk Resources, LTD.
P.O. Box 110
65 Vrooman Ave
Amsterdam, NY 12010
(800) 833-2006
(518) 842-1431
FAX: (518) 842-1289
www.mohawklifts.com



GSA
contract
#GS-07F-
207AA

AVAILABLE UNDER
DISCOUNTED
GOVERNMENT CONTRACT
IN ALL 50 STATES



DISTRIBUTED BY: